



NSGV Vibration Isolators

**R.I.S.
(Rubber-in-Shear)**

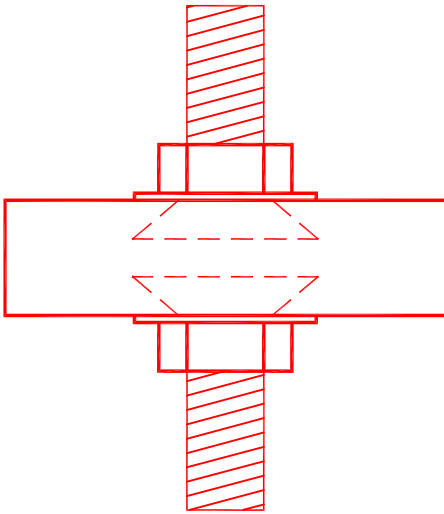


R.I.S. rubber-in-shear vibration isolation pads are constructed with chemical bonded rubber to a 3/8"Ø stud. Use in compression loads only.

**SHS-13
(Spring Hanger)**

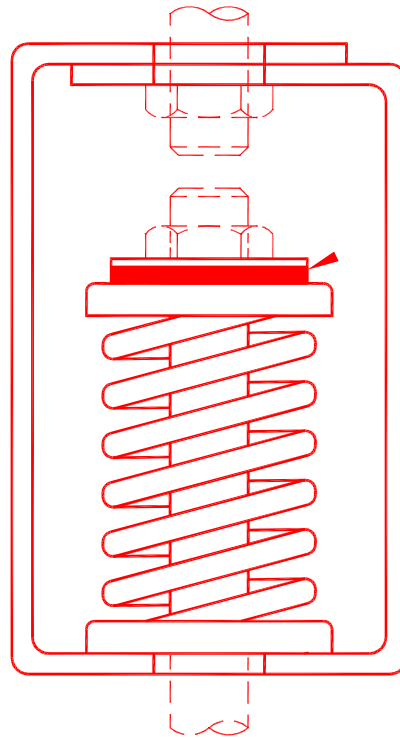

SHS-13 spring vibration hangers consist of a rectangular painted steel housing containing one steel spring as the isolation medium, a resilient neoprene washer under a steel washer.

**BE-12
(Spring Mount)**

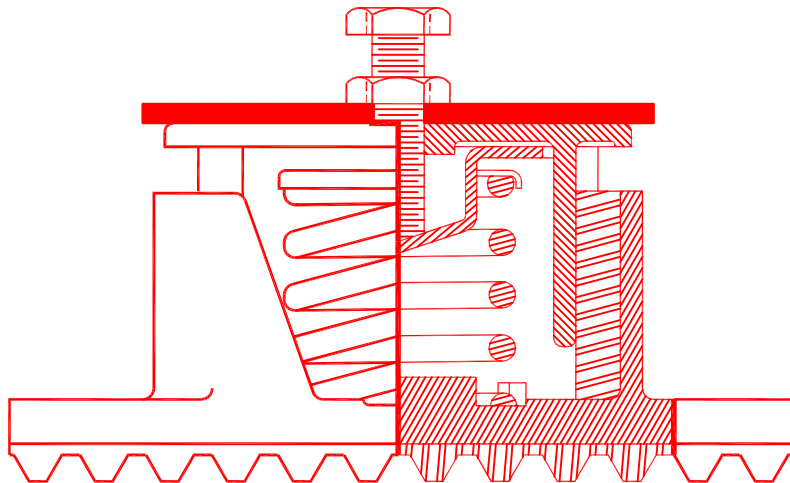

BE-12 spring vibration mount style consists of a painted steel telescoping housing containing one steel spring as the isolation medium, a built-in leveling bolt, resilient inserts to act as upper and lower housing guides and a neoprene pad bonded to the base plate.

800-728-8368 (phone) / 217-422-5387 (fax) / jmdilligaf@aol.com / NSGV.com